



AIR CONDITIONING



REFRIGERATION



HEATING



Silent+ Mini Lime®

CONDENSATE REMOVAL PUMP

The next generation Silent+ Mini Lime has an anti-vibration damper and built-in sound absorbing materials. As well as a quick release reservoir, you can also commission the pump on site, and check operation via the LED system in the reservoir. Silence isn't golden, it's lime.



12L/h max. flow



10m max. rec. head (flow rate 6L/h)



20dB(A) @ 1m

KEY FEATURES


- Anti-vibration damper
- Pump sits in trunking elbow
- LEDs provide visual operating feedback

SUITABILITY


- Up to 16kW / 54,000Btu/h
 - High wall split systems
 - Left or right install with range of trunking systems
- ✓ **Perfect for...** Commercial use where silence is important



NEXT GENERATION SILENT+ MINI LIME

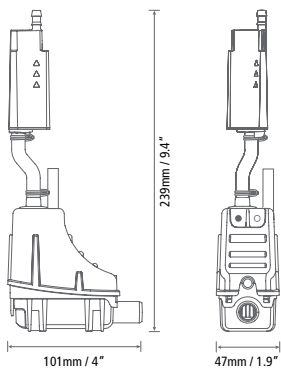

0.31 kg†

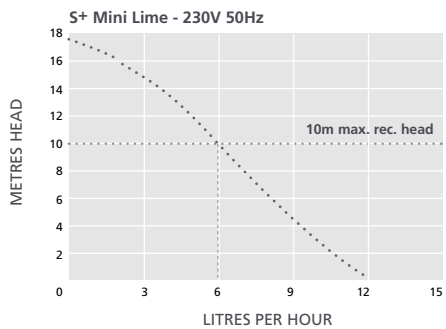

SUGGESTED XTRA ACCESSORIES

Description	Part No.
1 Amp Fuse	FP2620
Tube To Soil Stack Adaptor	FP2038
Vinyl Tube Braided 1/4" (6mm)	AX5100



For more installation accessories take a look at our Aspen Xtra range

SILENT+ MINI LIME @ 230 VAC 50Hz

Max. flow	12L/h @ 0 head
Max. rec. head	10m
dB(A) @ 1m	20*
Power supply	230 VAC, 0.1A, 16W, 50/60Hz
Rated Class	Non continuous II appliance <input type="checkbox"/>
Max. unit output	16kW / 54,000Btu/h
Max. water temp	40°C / 104°F
Discharge tube	6mm ID
IP Protection	IP24
Safety switch	5.0A N.C. / N.O.**
Thermal protection	✓
Self priming	✓

SILENT+ MINI LIME SYSTEM OPTIONS

System	Colour	Part No.
Slimline	<input type="radio"/> Ivory	FP3312/2
	<input type="radio"/> White	FP3319/2
SpeediDuct (BBJ)	<input type="radio"/> Ivory	FP3316/2
	<input type="radio"/> White	FP3320/2
Inoac	<input type="radio"/> Ivory	FP3317/2
	<input type="radio"/> White	FP3321/2
Artiplastic	<input type="radio"/> Ivory	FP3315/2
	<input type="radio"/> White	FP3327/2
Optimal (EU ONLY)	<input type="radio"/> White	FP3327/2
Silent+ Mini Lime Replacement†		FP3322/2

IN THE BOX

Silent+ Mini Lime pump (including 1.5m hard wired power cable) • Anti-vibration pulse damper, anti-siphon device & 500mm discharge tube assembly • 500mm Lime green inlet hose 14mm ID • 40mm Vinyl breather tube 6mm ID • Elbow front and back • 800mm Conduit front and back • Internal conduit sleeve (Slimline system only) • Gasket (Slimline, Speediduct and Inoac systems only) • Ceiling plate • Drain connector kit • Fixing kit • Install manual



Download manual at aspenspumps.com



View install video at aspenspumps.com

*Assuming solid wall construction with a 2kW unit.
** 5.0A volt free with Normally Closed/Normally Open contacts. Default factory set to Normally Closed mode.

† Pump only – no trunking included

