



# Cold Cabinet

## CONDENSATE REMOVAL PUMP

A superior stainless steel refrigeration pump built to last. Designed to fit beneath refrigeration units, it pumps away defrost water and filters debris.

225 L/h max. flow


35m max. head (flow rate 10 L/h)

### Key Features


- Large reservoir
- Stainless steel case
- Plug & Play

### Suitability

- Single and multiple refrigeration units, OEM
- **Perfect for...** Multiple refrigeration units

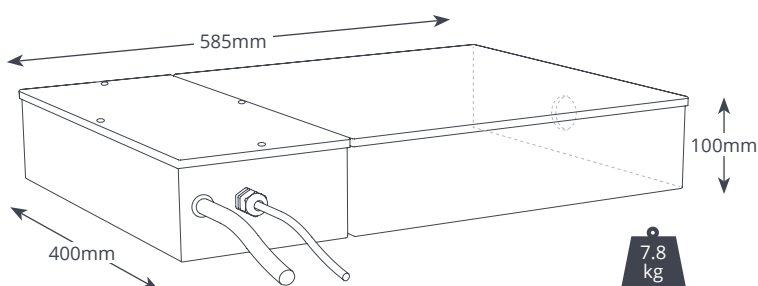

@ 230 VAC 50Hz	
Max. flow	225L/h @ 0m head
Max. rec. head	35m
Tank capacity	11L
dB(A) @1m	60 dB(A)
Power supply	230 VAC, 50-60Hz, 0.38A
Rated	Non continuous
Class	I
Max. unit output	n/a
Max. water output	40°C (104°F)
Inlet/Outlet	50mm in 10mm out
IP Protection	IP21
Safety Switch	3.0A Normally closed
Thermal protection	✓
Fully potted	n/a
Self priming	n/a

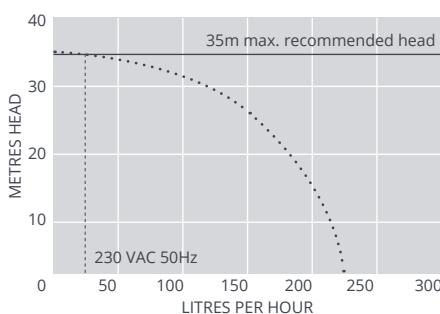

OPTIONS	
Cold Cabinet – side inlet	FP2120

SUGGESTED XTRA ACCESSORIES		
Description		Part No.
1 Amp Fuse		FP2620
Tube to Soil Stack Adaptor		FP2038
Vinyl Tube Braided 3/8" (10 mm)		AX5101

For more installation accessories take a look at our Aspen Xtra range

IN THE BOX
Cold Cabinet pump • 2m Plug & Play power cable • 1 1/2" BSP connector (for 40mm ID waste pipe)* • Install manual

Download manual at [aspenspumps.com](http://aspenspumps.com)