



Low Profile

CONDENSATE REMOVAL PUMP

Designed exclusively to fit underneath retail refrigeration cabinets the lightweight plastic ERRP (Economical Retail Refrigeration Pump) allows for the removal of defrost and contaminated water.



190L/h max. flow




21m max. head
(flow rate 10 L/h)

Key Features


- Lightweight & slim
- Easy to clean and carry
- Filter to catch debris
- Plug & Play

Suitability

- Refrigeration units; cold store cabinets
- **Perfect for...** Single & multiple refrigeration units

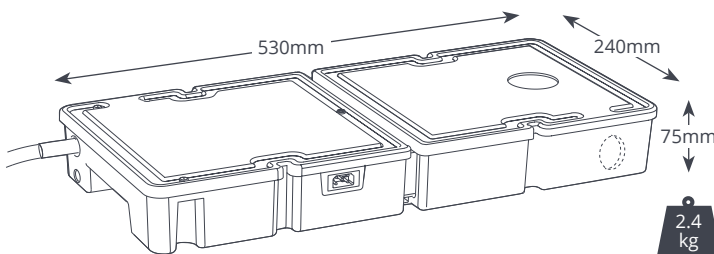

@ 230 VAC 50Hz	
Max. flow	190L/h @ 0m head
Max. recommended head	21m
Tank capacity	3.5L
dB(A) @1m	60 dB(A)
Power supply	230 VAC, 50-60Hz, 0.2A
Rated	Non continuous
Class	I
Max. unit output	n/a
Max. water output	40°C (104°F)
Inlet/Outlet	50mm in 10mm out
IP Protection	IP24
Safety Switch	3.0A Normally closed
Thermal protection	✓
Fully potted	n/a
Self priming	n/a

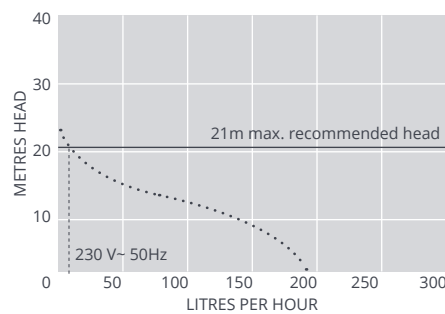

OPTIONS	
Low Profile ERRP – Side inlet	FP2805

Download manual at aspenspumps.com

SUGGESTED XTRA ACCESSORIES		
Description		Part No.
1 Amp Fuse		FP2620
Tube to Soil Stack Adaptor		FP2038
Vinyl Tube Braided 3/8" (10 mm)		AX5101



For more installation accessories take a look at our Aspen Xtra range

IN THE BOX
Low Profile ERRP pump • 2m Plug & Play power cable • 11/2" BSP connector (for 40mm ID waste pipe)* • Install manual