



Silent+ Mini Aqua®

CONDENSATE REMOVAL PUMP

Combining Silent+ technology and the slimmest mini pump on the market, the Silent+ Mini Aqua leads the way in innovation.

12L/h max. flow

10m max. rec. head (flow rate 6L/h)

19dB(A) @ 1m


Key Features

- Quietest in its class
- Acoustic damper
- Plug & Play
- Anti siphon device


Suitability

- Up to 16kW / 54,000 Btu/h
- Ducted units; Floor standing & Chassis units; High wall mini split systems
- **Perfect for...** Small & quiet – you'll never know it's there!

0.18 kg

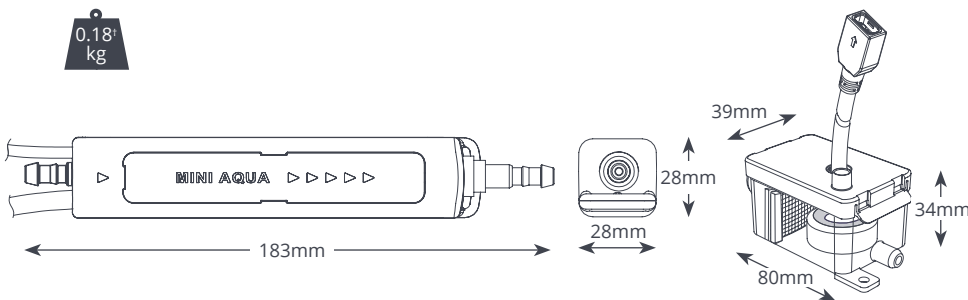

@ 230 VAC 50Hz	
Max. flow	12L/h @ 0m head
Max. rec. head	10m
Max. suction lift	2m
dB(A) @ 1m	19dB(A)
Power supply	230 VAC, 50-60 Hz, 0,11A, 16W
Rated	Non continuous
Class	II
Max. unit output	16kW (54,000 Btu/h)
Max. water temp	40°C (104°F)
Discharge tube	6mm ID
IP Protection	IP24
Safety switch	3.0A Normally closed
Thermal protection	✓
Fully potted	✓
Self priming	✓

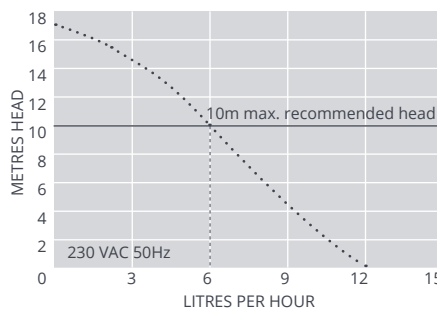

SUGGESTED XTRA ACCESSORIES

Description	Part No.
1 Amp Fuse	FP2620
Tube To Soil Stack Adaptor	FP2038
Vinyl Tube Braided 1/4" (6mm)	AX5100

OPTIONS

Silent+ Mini Aqua FP3326

† Pump only

IN THE BOX

- Silent+ Mini Aqua pump
- Reservoir (inc. filter, float, lid)
- 1.5m Plug & Play power cable
- Acoustic damper and 1m aqua discharge tube with connector
- Anti vibration bracket
- 150mm Vinyl breather tube 6mm ID
- Anti siphon device
- 1.5m Suction tube 6mm ID
- 220mm Blue inlet hose 14mm ID
- Drain connector kit
- Fixing kit
- Install manual

Visit aspenspumps.com for more installation accessories.

Download manual at aspenspumps.com

Watch installation video at aspenspumps.com