

MAX Hi-Flow

CONDENSATE REMOVAL PUMP

The best in class Max Hi-Flow tank pump carries on the Aspen Pumps tradition of build quality & high performance. With the lowest dB(A) rating & best IP rating (IP24 splash proof) of any tank pump, the Max Hi-Flow is the quietest & best pump in its class.



550 L/h max. flow





5m max. rec. head
(flow rate 55L/h)

Key Features


- IP24 – Splash proof
- Easy access tank
- Built in spirit level
- Plug & Play

Suitability



- Up to 733kW (2.5m Btu/h)
- Ducted units; Floor standing & Chassis units; Cassette units
- **Perfect for...** Large commercial units

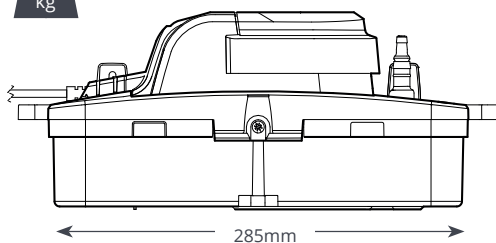

Non-return valve can be cut from 6mm to 10mm (see graphs below)



@ 230 VAC 50HZ	
Max. flow	550L/h @ 0m head
Max. rec. head	5m
Tank capacity	1,7L
dB(A)@1m	44dB(A)
Power supply	230 VAC, 0.8A, 50Hz
Rated	Non Continuous
Class	I
Max. unit output	733kW (2.5m Btu/h)
Max. water temp	40°C (104°F)
Inlets	x4 21–27mm
Outlets	6mm & 10mm
IP Protection	IP24
Safety switch	3A Normally closed
Thermal protection	✓
Fully potted	n/a
Self priming	n/a

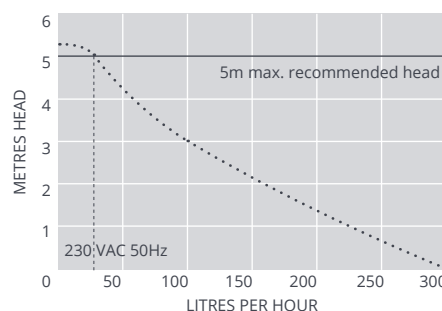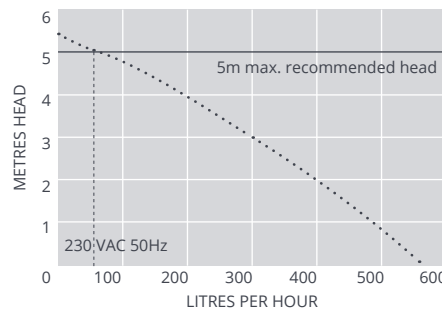

OPTIONS

Max Hi-Flow	FP3349
-------------	--------

SUGGESTED XTRA ACCESSORIES

Description	Part No.
Rubber adaptor	FP2013
Rigid pipe 15mm / 3/4"	B7501
Hose to waste	FP2038
Max Hi-Flow Insulation Sleeve	AX2500

IN THE BOX

Max Hi-Flow tank pump • Plug & Play power cable • Fixing kit incl. rod mount and wall mount clips • Install manual

Download manual at aspenspumps.com

Watch installation video at aspenspumps.com